

# ENSIGN


PORTABLE TABLETOP LECTERN

*Ensign is truly portable—it folds up into a compact package that weighs just 34 pounds.*

*Roto-molded polyethylene skin that's remarkably durable.*

*Handles audiences of 500; up to 1,000 with companion a speaker.*

*Add our QuikStand portable base and Ensign becomes a full-size floor lectern.*

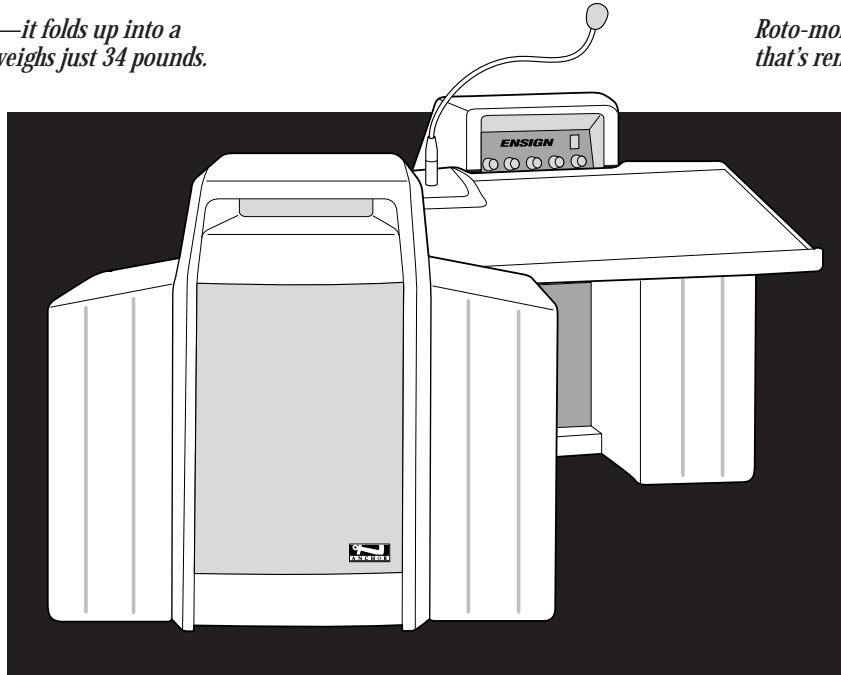


*Integrated circuit amplifier with short circuit and thermal overload protection.*

*Comes with a 6 year warranty.*

*TL-2B features rechargeable batteries and a built-in charger.*

*Custom microphone shockmount allows more sound output with less feedback.*

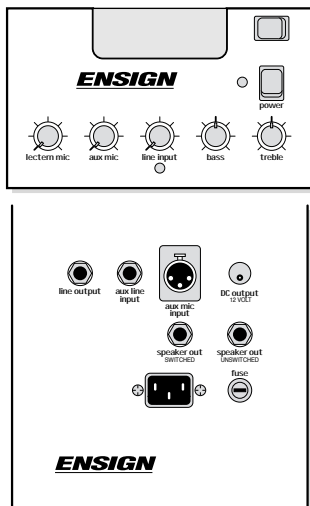

*Ensign control panels.*

## MODELS

### TL-2A

*AC-powered tabletop lectern.*

### TL-2B

*Battery-powered tabletop lectern with built-in charger.*

## WIRELESS

### SWR-II

*Outboard wireless receiver (order wireless mic separately).*

### WH-58

*Handheld wireless microphone/transmitter.*

### LM-60/WB-II

*Lapel microphone with WB-II wireless body-pack transmitter.*

*WB-II transmitter also available with CollarMic and headband mic.*

### DCM

*Interconnect cable for Ensign outboard wireless systems.*

## ACCESSORIES

### BLT

*QuikStand folding base.*

### P-3001

*Unpowered companion speaker.*

### SS-450

*Speaker stand for P-3001.*

### MIC-90

*Handheld mic; balanced, Lo-Z.*

### TLC-II

*Storage cover.*

## SPECIFICATIONS

### TL-2A

Rated power output: 70 watts

Max SPL @ rated power: 115 dB @ 1 meter

### TL-2B

Rated power output: 50 watts

Max SPL @ rated power: 113 dB @ 1 meter

Battery (two): 12 volt rechargeable, 2.6 AH

### General

Sensitivity for rated output:

Microphone: -52 dBV (2.5 mVrms)

Line: -14 dBV (200 mVrms)

Frequency response: 100 Hz - 10 kHz  $\pm$  3 dB

Lectern Mic input: Lo-Z, balanced, phantom powered

Auxiliary Mic input: Lo-Z, balanced, phantom powered, XLR

Line input: Hi-Z, unbalanced, 1/4"-phone

Line output (post fader): buffered, 600 $\Omega$ , 1/4"-phone

AC power requirements: 110 - 125 VAC, 50/60 Hz

210 - 240 VAC, 50/60 Hz

Dimensions folded (HWD): 23 x 24 x 10", 58 x 61 x 26 cm

Weight: TL-2A 34 pounds, 15 Kg.

TL-2B 39 pounds, 18 Kg.

Specifications subject to change without notice.