

VOYAGER


SOUND SYSTEM

Clear, powerful voice projection for crowds of 400 or more.

Simple to set up and operate.

Runs up to 10 hours on a charge.

Has a 20-watt speaker output to power companion speakers.

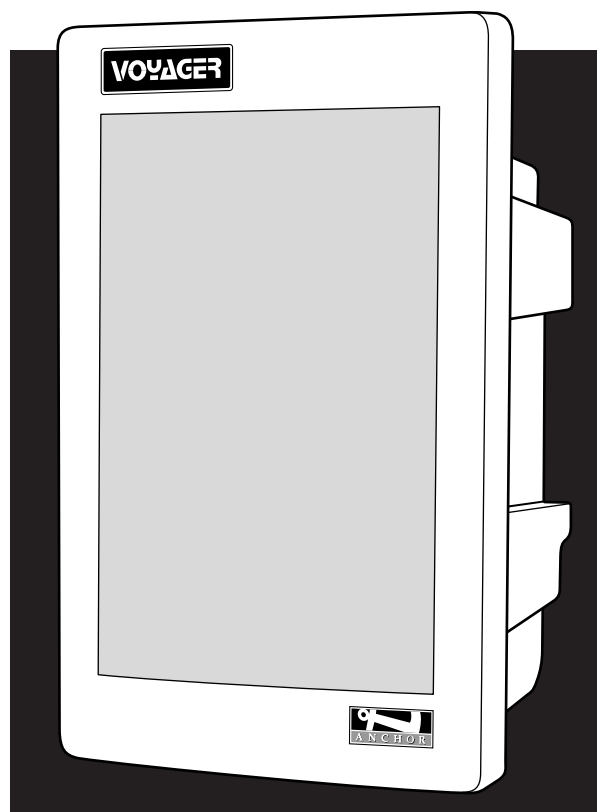


Two 5-inch high-efficiency cone drivers.

Weighs just 20 pounds.

Short circuit and thermal overload protection.

Durable injection-molded polypropylene case.

Comes with a 6-year warranty.

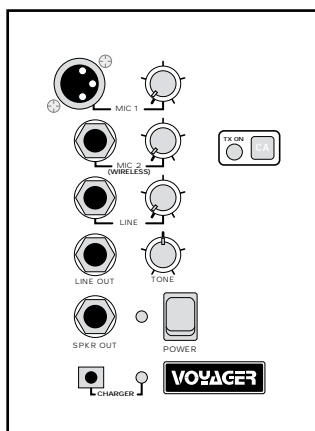

Voyager control panel.

MODELS

PB-3000

Battery-powered sound system; includes charger.

WIRELESS

PB-3000W

Voyager with built-in wireless receiver (order mic separately).

WH-58

Handheld wireless microphone/transmitter.

LM-60/WB-II

Lapel microphone with WB-II wireless body-pack transmitter.

WB-II transmitter also available with CollarMic and headband mic.

ACCESSORIES

MIC-90

Handheld mic with XLR plug; balanced, low impedance.

MIC-90P

Handheld mic with 1/4"-phone plug; balanced, low impedance.

SS-450

Heavy-duty speaker stand.

P-3001

Unpowered companion speaker.

VL-25

Storage cover.

SPECIFICATIONS

PB-3000, PB-3000W

Rated power output:	2 x 20 watts @ 4Ω
Max SPL @ rated power:	110 dB @ 1 meter
Frequency response:	100 Hz - 12 kHz
Mic input 1:	Lo-Z, balanced, phantom powered, XLR
Mic input 2:	Lo-Z, unbalanced, 1/4"-phone (input 2 used for wireless)
Line input:	Hi-Z, unbalanced, 1/4"-phone
Line output (post fader):	Lo-Z, buffered, 1/4"-phone
Speaker output:	20 watts @ 4Ω, unswitched, 1/4"-phone

Battery:	12 volt rechargeable, 7.0 AH
Charger (Anchor RC-16):	16 volts AC, 1.5A, 60Hz
Dimensions (HWD):	16.5 x 10.5 x 10"; 42 x 27 x 25 cm
Weight:	20 pounds, 9.0 Kg.

Specifications subject to change without notice.