


ONE U RACK MOUNT

Art. No. 3541

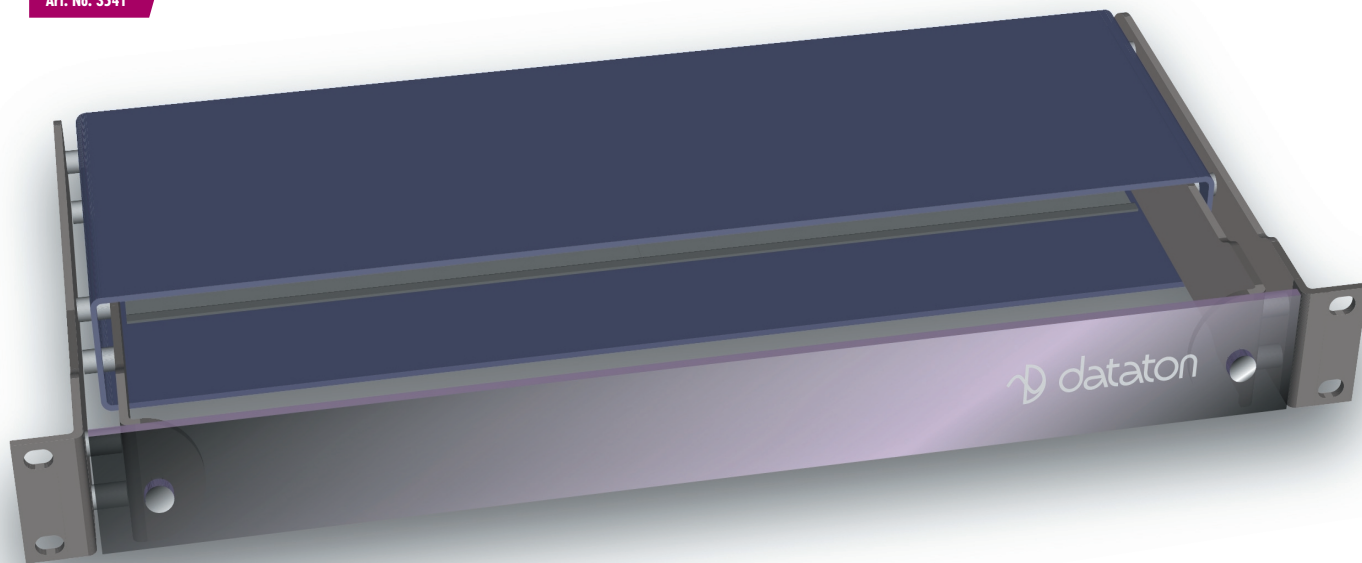

The Dataton rack mount puts the finishing touch to your show installation. The rack mount is one unit high with a built-in DIN rail. It handles several different constellations of Dataton units for utmost flexibility in the field.

The rack mount is delivered fully assembled; simply slot your Dataton units into place and screw the mount into a 19 inch rack. The smoked glass front protects and conceals units while revealing indicator lights.

GENERAL

Use the ONE U RACK MOUNT to install Dataton units in a standard 19 inch rack.

The mount handles two SMARTPAX QC-sized units, plus power supply. It is also ideal for use with KEYLINK units. Four KEYLINK units, one SMARTPAX QC and one 12V DC ADAPTOR fit perfectly into the rack mount.

The ONE U RACK MOUNT is delivered pre-assembled. The top cover and base are removed with a torx. Use the enclosed nuts and original screws to conceal the holes left by the three posts.

The smoked glass front lets the user see the indicator lights on the Dataton units, while protecting the units from any casual prodding.

Running along the base plate is a 35 mm DIN rail to facilitate installation.

USAGE

Remove the smoked glass front (if attached) before inserting your Dataton units in the ONE U RACK MOUNT.

You may also need to remove the top cover and posts, eg, if you want to insert a 12V DC ADAPTOR as shown in the illustrations.

KEYLINK units are mounted with the keys towards the back; other Dataton units are mounted with the control dials facing forwards.

Line up the units with the clips in the rack.

To insert a unit: gently, but firmly, push it backward at a slight downward angle. Push until the clips grip the edge of the unit, thereby holding it in place.

To remove a unit from the rack mount: push the unit backward until the front clips release their hold. Depress the sprung clips and pull the unit out.

Connect power and control cables.

Slot the ONE U RACK MOUNT into a 19 inch rack and secure it.

When you are satisfied that the installed units are working correctly, screw the smoked glass front into place.



Top: Rack mount with two SMARTPAX QC and a 12V DC ADAPTOR.

Bottom: SMARTPAX QC, 12V DC ADAPTOR, and four KEYLINK units.

Similar sized units, such as POWERLINK, also fit into the rack mount.