

ENSIGN PRO

PORTABLE TABLETOP LECTERN SOUND SYSTEM

Dual 4.5-inch neodymium speakers

Weights less than 23 pounds

Automatic speech project

"Voice over" music feature

Short circuit and thermal overload protection

Durable polyethylene case


Quick to set up & simple to operate

Reach crowds up to 400

Two universal input jacks

Active distortion limiter

Output powers companion speaker

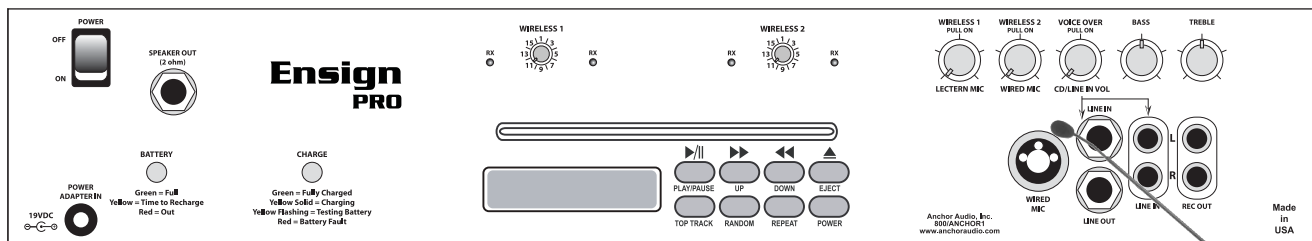

(ENS-6000CU2 Control Panel Shown)

Delivers up to 105 dB of clear sound

True AC/DC - 110/220V power supply

Single or dual UHF wireless 16 user selectable channels

LED displays for battery level and charge condition

Rapid charger circuitry charges drained battery in as little as 60 mins

High fidelity sound from high-efficiency amp & full-range speaker

Sensitive electret 24" gooseneck mic

Detachable LED reading light

Rugged built-in CD player w/ blue backlit display



MODELS

ENS-6000

AC/DC powered sound system

ENS-6000C

Ensign w/ built-in CD player

ENS-6000U1

Ensign w/ one built-in UHF wireless receiver

ENS-6000U2

Ensign w/ two built-in UHF wireless receivers

ENS-6000CU1

Ensign w/ one built-in UHF wireless receiver & CD player

ENS-6000CU2

Ensign w/ two built-in UHF wireless receivers & CD player

WIRELESS MICS

WH-6000

Handheld wireless microphone/transmitter

WB-6000

Wireless body-pack transmitter (order mic separately)

EM-60

Lightweight "over-the-ear" microphone for use w/ WB-6000 transmitter

CM-60

CollarMic microphone for use w/ WB-6000 transmitter

HBM-60

Headband microphone for use w/ WB-6000 transmitter

LM-60

Lapel microphone for use w/ WB-6000 transmitter

ACCESSORIES

EXP-6001

Unpowered companion speaker

SC-50

50' speaker cable for EXP-6001

SS-550

Heavy-duty speaker stand (for use with EXP-6001)

SOFT-TOTE-ENS

Nylon storage/transport bag w/ wheels and collapsible handle

MIC-90

Professional dynamic, cardioid pattern handheld mic

SPECIFICATIONS

ENS-6000

Rated power output:	60 watts AC mode / 30 watts DC mode
Max SPL @ rated power:	105 db @ 1 watt/1 meter
Frequency response:	100 Hz - 16 kHz
Microphone inputs:	Lo-Z (1 k Ω), balanced, XLR 12 VDC condenser mic (phantom) power Hi-Z (10 k Ω), unbalanced, 1/4"-phone
Auxiliary (line) input:	Hi-Z (10 k Ω), unbalanced, 1/8" stereo, 1/4"-phone
Sensitivity for rated output	
Line:	-8.4 dBV (380 mVrms)
Mic (unbalanced):	-49 dBV (3.63 mVrms)
Mic (balanced):	-49 dBV (3.63 mVrms)
Line output (post fader):	Lo-Z, buffered, dual RCA/1/4" unbalanced/balanced
Speaker output:	2 Ω , unswitched, 1/4"-phone
AC Power requirements:	90 - 264 VAC, 50/60 Hz
Dimensions (HWD):	10.4 (front)/7.5 (back) x 22.2 x 18" 26.5 (front)/19 (back) x 56.4 x 45.8 cm.
Weight:	22 pounds, 9.9 Kg.

6-YEAR WARRANTY / MADE IN THE USA!

Specifications subject to change without notice.