

# SEVILLE

LECTERN SYSTEM

## 6-YEAR WARRANTY!

Reach crowds of 750+

Powerful built-in 70-watt sound system

Sensitive electret microphone

Shock-absorbing mic mount

Optional built-in wireless microphone system

Microphone mounted on 18" gooseneck



## MADE IN THE USA!


6 1/2" woofer coupled with extended-range horn tweeter provide natural voice projection

Dual-intensity reading light

Line-level output for recording

Deluxe model has rich, golden oak surfaces & solid oak trim

Tilt-n-roll casters for easy transport

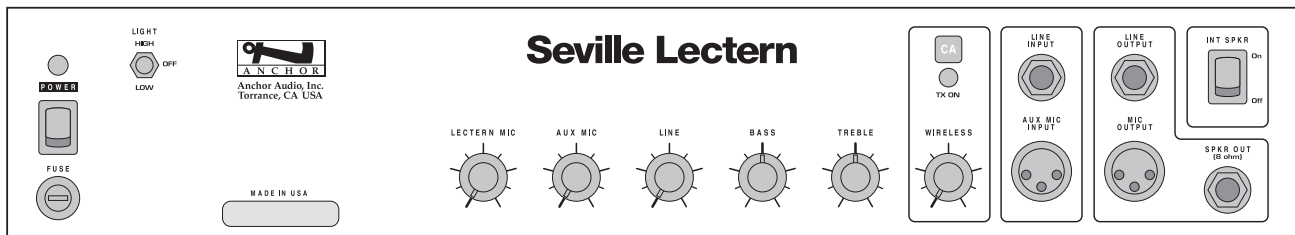

(LP-500W Control Panel Shown)

### MODELS

#### LP-500

Lectern with sound system

#### LP-500W

Lectern with wireless VHF sound system

#### WIRELESS UHF

UHF-6400  
64 channel UHF wireless receiver/transmitter set with choice of wireless microphone - handheld, lapel, collar or headband

#### ACCESSORIES

LC-650  
Padded nylon slipcover  
LM-618  
Gooseneck microphone 24" with XLR connector

### SPECIFICATIONS

#### LP-500

Rated power output:	70 watts continuous
Max SPL @ rated power:	107 dB @ 1 meter
Frequency response:	65 Hz - 15 KHz
Speaker type:	6.5-inch woofer, high-output tweeter
Lectern Mic input:	Lo-Z, balanced, phantom power, XLR
Auxiliary Mic input:	Lo-Z, balanced, phantom power, XLR
Line input:	Hi-Z, unbalanced, 1/4"-phone
Sensitivity for rated output	
Microphone:	-52 dBV (2.5 mVrms)
Line:	-14 dBV (200 mVrms)
Mic output (post fader):	Lo-Z, transformer balanced, XLR
Line output (post fader):	buffer isolated, 1/4"-phone
Speaker output:	70 watts @ 4Ω, switched, 1/4"-phone
AC Power requirements:	110 - 125 Volts AC, 50/60 Hz 210 - 240 Volts AC, 50/60 Hz (40 VA nominal, 120 VA max)
Dimensions:	49 x 24 x 21", 125 x 61 x 53 cm
Weight:	122 pounds, 55 Kg.

Specifications subject to change without notice.