

# Xtreme



The Xtreme is an AC powered sound system that delivers a powerful 123 dB of crystal clear speech projection - that's louder than a rock & roll band! With the convenience of a built-in CD player and a wireless microphone, the Xtreme is great for large indoor and outdoor events such as sporting events, press conferences, graduation ceremonies or musical productions.



## MADE IN THE USA!

Weather Resistant Speaker Cone • Speech Projection Switch

UV Treated - Fade Resistant Case • Bass and Treble Controls

Built-in CD and UHF Receiver Option - 16 User-Selectable Channels

Rugged CD Mechanism with Blue Back-Lit Display

Integrated Circuit Amplifier w/Short Circuit and Thermal Overload Protection

Speakon® Output for XTR-6001 • 1/4" Line Input

XLR Balanced Output, XLR Balanced Mic Input

## 6-YEAR WARRANTY!

### XTREME BASIC PACKAGE

- Xtreme (XTR-6000CU1) with wireless receiver and built-in CD Player
- Heavy duty speaker stand (SS-550)
- Choice of microphone:
  - Handheld WH-6000 or
  - Headband HBM-60, Lapel LM-60 or Collar Mic CM-60 and Body Pack Transmitter (for Headband Mic) WB-6000

### XTREME DELUXE PACKAGE

- Xtreme (XTR-6000CU1) with wireless receiver and built-in CD Player
- Xtreme companion speaker (XTR-6001)
- Speaker cable (SC-50)
- 2 Heavy duty speaker stands (SS-550)
- Choice of microphone:
  - Handheld WH-6000 or
  - Headband HBM-60, Lapel LM-60 or Collar Mic CM-60 and Body Pack Transmitter (for Headband Mic) WB-6000

FOR MORE INFORMATION PLEASE CALL:

**800.262-4671**

[www.anchoraudio.com](http://www.anchoraudio.com)



# XTREME

DUAL-FUNCTION SOUND SYSTEM

## MADE IN THE USA!

Reach crowds of 5,000+


Delivers up to 123 dB  
of clear sound

Clear and powerful sound,  
thanks to an 8-inch woofer  
and constant-directivity  
titanium dome compression  
driver in a ported enclosure

Active limiter—keeps sound  
clean even when driven hard

The XLR input allows use  
of line level or microphone  
sources, with or without  
condenser mic power

Neutrik Speakon® connector  
for use with XTR-6001

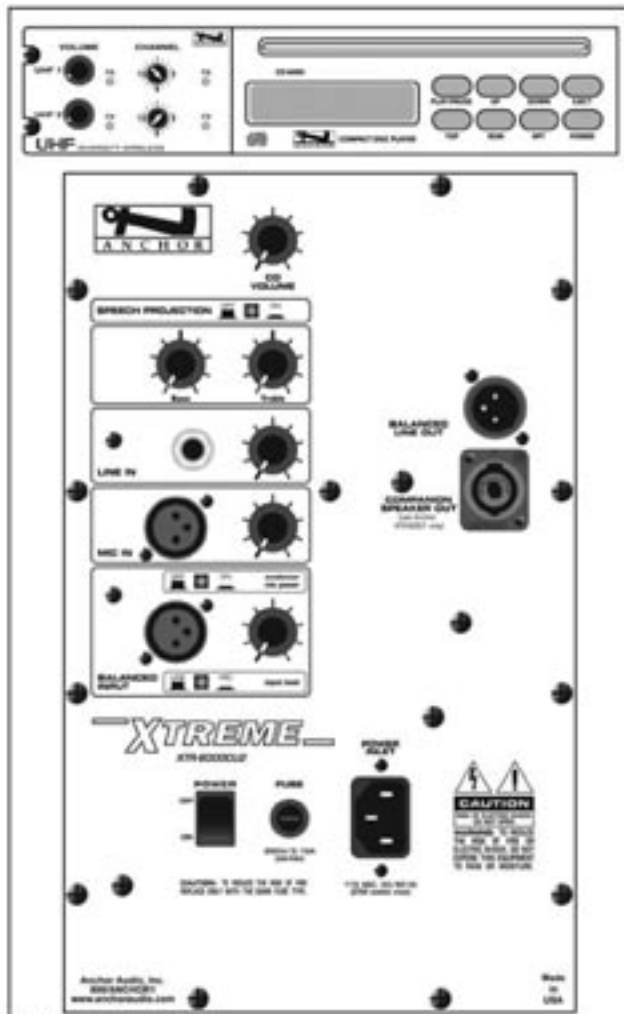

(XTR-6000CU2 Back Panel Shown)

## 6-YEAR WARRANTY!

Now featuring 16 channel UHF  
diversity wireless  
by Anchor Audio

Rugged CD mechanism with  
blue back-lit display and bar  
graph level display

Up to 2 wireless receivers with  
built-in CD player


Line-level, balanced  
output supplies signal to  
additional sound system

Speech projection mode  
provides crystal-clear  
voice projection

Bi-amplified; separate high and  
low frequency amplifiers for  
enhanced performance

Daisy-chain ready,  
connect Xtreme's together for  
expanded coverage

## Xtreme Daisy-Chain



Simple line-out to line-in  
connection expands your coverage

## UHF WIRELESS

### WH-6000

Handheld wireless microphone/  
transmitter

### WB-6000

Wireless body-pack transmitter

Microphone options include:

Lapel/LM-60, Collar/CM-60 and

Headband/HBM-60

## ACCESSORIES

### XTR-6001

Unpowered companion speaker

### FL-4500

Admiral lectern

### MIC-90

Professional dynamic, cardioid  
pattern handheld mic

### SS-550

Heavy-duty speaker stand

### NL-6000

Storage cover

### HC-1650L/X

Custom traveling hard case

### SC-100NL

100' speaker cable for XTR-6001

### EX-50PP

50' shielded line cable

## MODELS

### XTR-6000

AC powered sound system

### XTR-6000C

AC powered sound system with  
CD player installed

### XTR-6000U1

AC powered sound system with  
1 wireless receiver installed

### XTR-6000U2

AC powered sound system with  
2 wireless receivers installed

### XTR-6000CU1

AC powered sound system with  
CD player and 1 wireless  
receiver installed

### XTR-6000CU2

AC powered sound system with  
CD player and 2 wireless  
receivers installed

## SPECIFICATIONS

### XTR-6000

Rated power output

Stand-alone: 130 watts  
w/XTR-6001: 200 watts

Max SPL @ rated power

Projection mode: 123 dB  
Music mode: 116 dB

Frequency response

Music mode: 80 Hz - 15 kHz  
Projection mode: +7 dB from 2 - 12 kHz

Bass/Treble control:

8 dB cut/boost @ 100 Hz, 8 kHz

Line input:

1/4" phone, Hi-Z, unbalanced

Mic input:

XLR female, Lo-Z, 12 VDC phantom power

Balanced input:

XLR female, switchable mic/line level  
12 VDC phantom power (switchable)

Sensitivity for rated output

Unbalanced line: -18 dBV (125 mVrms)

Balanced mic: -58 dBV (1.25 mVrms)

Balanced input - mic: -58 dBV (1.25 mVrms)

Balanced input - line: -15 dBV (175 mVrms)

Line output (post fader):

XLR male, 600Ω, active balanced

Speaker Output:

4-pole Neutrik Speakon® jack for XTR-6001

AC power requirements:

110 - 125Vac, 50/60 Hz, 250W Max

210 - 240Vac, 50/60 Hz, 250W Max

Dimensions (HWD):

22.5 x 13 x 10", 57 x 33 x 26 cm

Weight:

35 pounds, 16 Kg.

Specifications subject to change without notice.