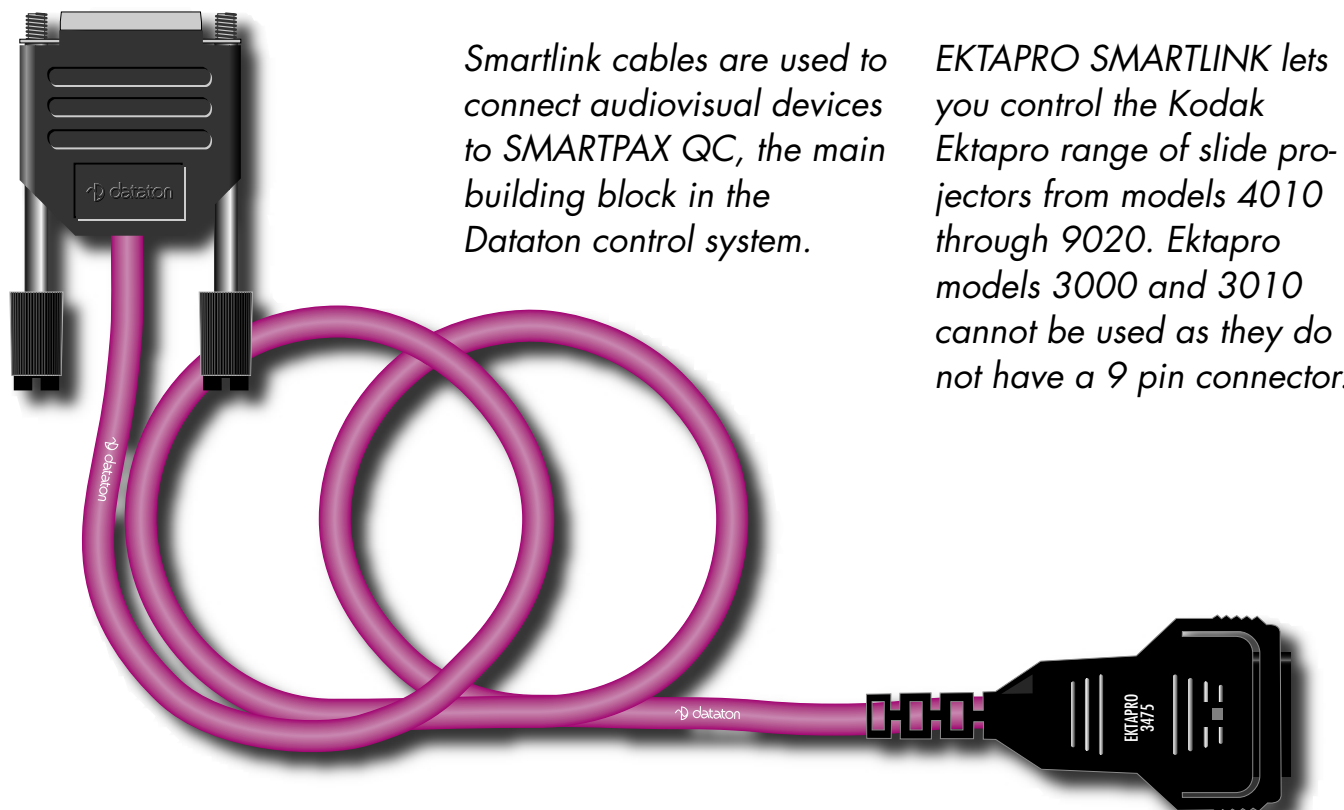# EKTAPRO SMARTLINK

Art. No. 3475

Smartlink cables are used to connect audiovisual devices to SMARTPAX QC, the main building block in the Dataton control system.

EKTAPRO SMARTLINK lets you control the Kodak Ektapro range of slide projectors from models 4010 through 9020. Ektapro models 3000 and 3010 cannot be used as they do not have a 9 pin connector.

EKTAPRO SMART-LINK

INSTALLATION

Plug the snap-lock connector into one of the four ports on the back of the SMARTPAX QC. Plug the other end of the cable into the *P-Bus In* connector on the projector. Set the projector's address selector at zero (this does not apply to models 4010 and 5000).

Always connect the smartlink before turning on the power. Plugging or unplugging with power on may cause damage.

Connect all projectors that are controlled from one SMARTPAX QC to the same mains outlet to avoid ground loop problems. Projectors controlled from different units may be powered from different mains outlets.

CONFIGURATION

In most cases, SMARTPAX is configured automatically from Dataton TRAX. You must, however, manually set the SMARTPAX port address to correspond to the projector's address in TRAX.
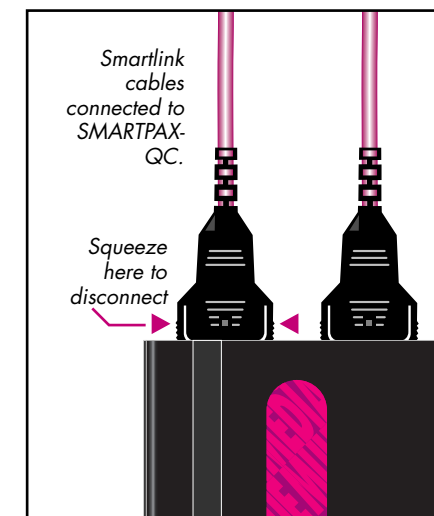
If you are using the manual mode in TRAX, you will need to configure the SMARTPAX QC using its port, address and device buttons.

Please refer to the SMARTPAX QC product sheet and the TRAX handbook for more details.

PROGRAMMING

You can use all slide projector cues for programming Ektapro projectors, just as you would do with any other slide projector. The random access feature speeds up programming, and provides a way to re-use slides without the need for duplicates.

Smartlink cables connected to SMARTPAX-QC.

Squeeze here to disconnect

Technical Description

EKTAPRO SMARTLINK connects Kodak Ektapro projector models 4010 to 9020 to SMARTPAX QC. It uses the P-Com serial data language to control the projector, which supports advanced features such as slide random access. The projectors are programmed from Dataton TRAX®.

The EKTAPRO SMARTLINK cable is 1.6m (63") long and may be extended with EXTENSION CABLE, article no: 3451 (1m), 3452 (2m) or 3455 (5m).

Pin number at SMARTPAX end	Color code	Signal symbol	Pin number at Ektapro end
1			
2	Red	TxD	2
3	Orange	GND	1,5
4	Yellow	RxD	3
5			
6			
7			
8	White	GND	1,5
9			
		Screen	1,5