



SYSTEM IN SMARTLINK

Art. No. 3477

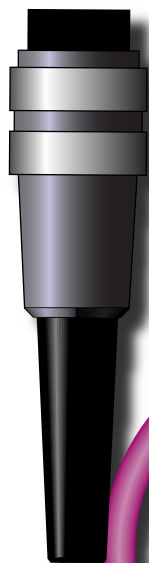

SYSTEM IN SMARTLINK is used to **INPUT** data from other Dataton control units to SMARTPAX QC. This function only works with Dataton TRAX version 3 or later.

The snap-lock connector plugs into one of the ports on the back of SMARTPAX; the male six pin plug goes to the DATA OUT connector on MICTOUCH, AIRLINK RECEIVER or TRANSPAX. For details on how to program applications using this smartlink, please refer to the device information database inside Dataton TRAX®.

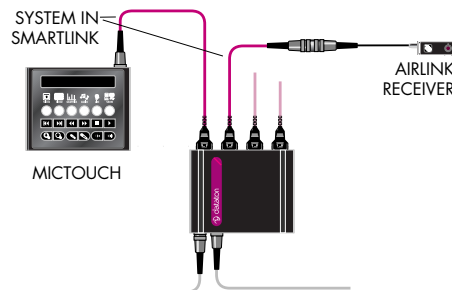

Using SYSTEM IN SMARTLINK

