



SYSTEM OUT SMARTLINK

Art. No. 3478

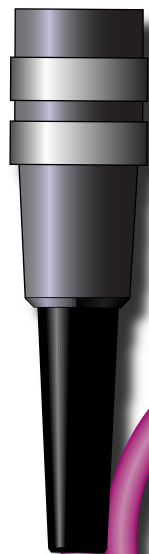

SYSTEM OUT SMARTLINK is used to feed data **OUT** to early Dataton units SERVOPAX, MOTORPAX and PAX, keeping them compatible with the most recent Dataton TRAX® environment (version 3 and later).

The six pin receptacle connects to the unit's DATA IN connector, and the nine pin snap-lock connector to one of the four ports on the back of SMARTPAX QC. For details on programming applications using this smartlink, please refer to the device information database inside Dataton TRAX.

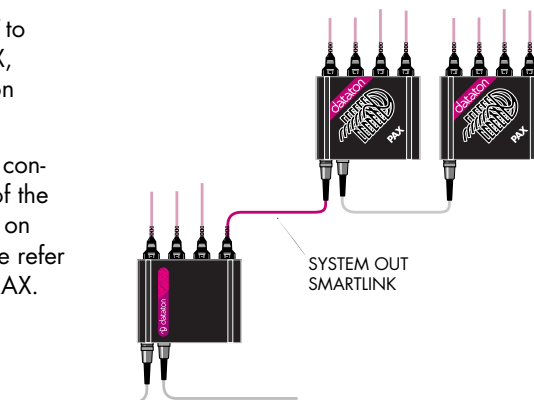

Using SYSTEM OUT SMARTLINK

