


# HIGH RESOLUTION VISUAL PRESENTER HV-7000SX

## SPECIFICATIONS

Power	Power source	AC120V 60Hz	
	Power consumption	45W	
Optics	Lens	10× (f=7.2~72mm) F2.8	
	Shooting area	Max. 362×290mm (14.3"×11.4")	
		Min. 40×32mm (1.6"×1.3")	
	Zooming	Powered (with double speed function)	
	Focusing	Auto/Manual	
Iris	Auto (with level adjustment)/Manual		
Picture	Image pick-up element	1/2" progressive scan CCD	
	Total picture element	1,434(H)×1,050(V)	
	Effective picture element	1,280(H)×1,024(V)	
	Sync. system	Internal	
	Horizontal resolution	More than 800 TV lines (RGB output)	
		More than 400 TV lines (Video output)	
	Analog RGB output	SXGA (1,280×1,024@75Hz), VESA	
		XGA (1,024×768@75Hz), VESA	
		SVGA (800×600@75Hz), VESA	
		VGA (640×480@75Hz), VESA	
	C-Video output	NTSC/PAL compatible	
	S-Video output	NTSC/PAL compatible	
	White balance	Full-auto/One push/Manual	
	Nega/posi conversion	Built-in	
	Color/B&W selection	Built-in	
	Image rotation	Built-in	
	Resolution selection	Built-in (SXGA→XGA→SVGA→VGA)	
	Gamma adjustment	Built-in (1.0/0.6)	
	Aperture selection	Built-in	
	Video output selection	Built-in (NTSC/PAL)	
	Pause mode	Built-in	
	Input/output	Enlargement of the image	Built-in (double, can be scrolled)
		Pointer	Controllable with Wireless Remote Control and Mouse
Shooting speed		7.5 frames/sec.	
Input selection		3 modes (Internal/RGB1/RGB2)	
RGB input		Mini DSUB 15 Pin connector female	
Audio input (stereo)		φ3.5mm stereo mini jack	
Mic. input (monaural)		φ6.3mm jack	
RGB output		Mini DSUB 15 Pin connector female	
C-Video output		RCA Pin jack	
S-Video output		Mini DIN 4 Pin connector	
Audio output (stereo)		RCA Pin jack	
Ext. control terminal		RS-232C/Mouse/USB	
Lighting		Upper lighting unit	Built-in, 6W fluorescent lamp×2
		Baselight	Built-in
Others		RS-232C control terminal	DSUB 9P connector female
	Mouse	DSUB 9P connector female	
	USB	Type B receptacle	
	DC output	DC 12 V (Max.0.9A)	
	Carrying handle	Built-in	
	Dimensions Set-up	700(W)×542(D)×615(H)mm (27.6×21.3×24.2 in)	
		Folded	400(W)×655(D)×187(H)mm (15.7×25.8×7.4 in)
	Weight	10 kgs (22 lbs)	

Note : Weight and dimensions are approximate.  
Design and specifications are subject to change without prior notice.  
Trademarks of registered trademarks are the property of their respective holders.

## PROFILE

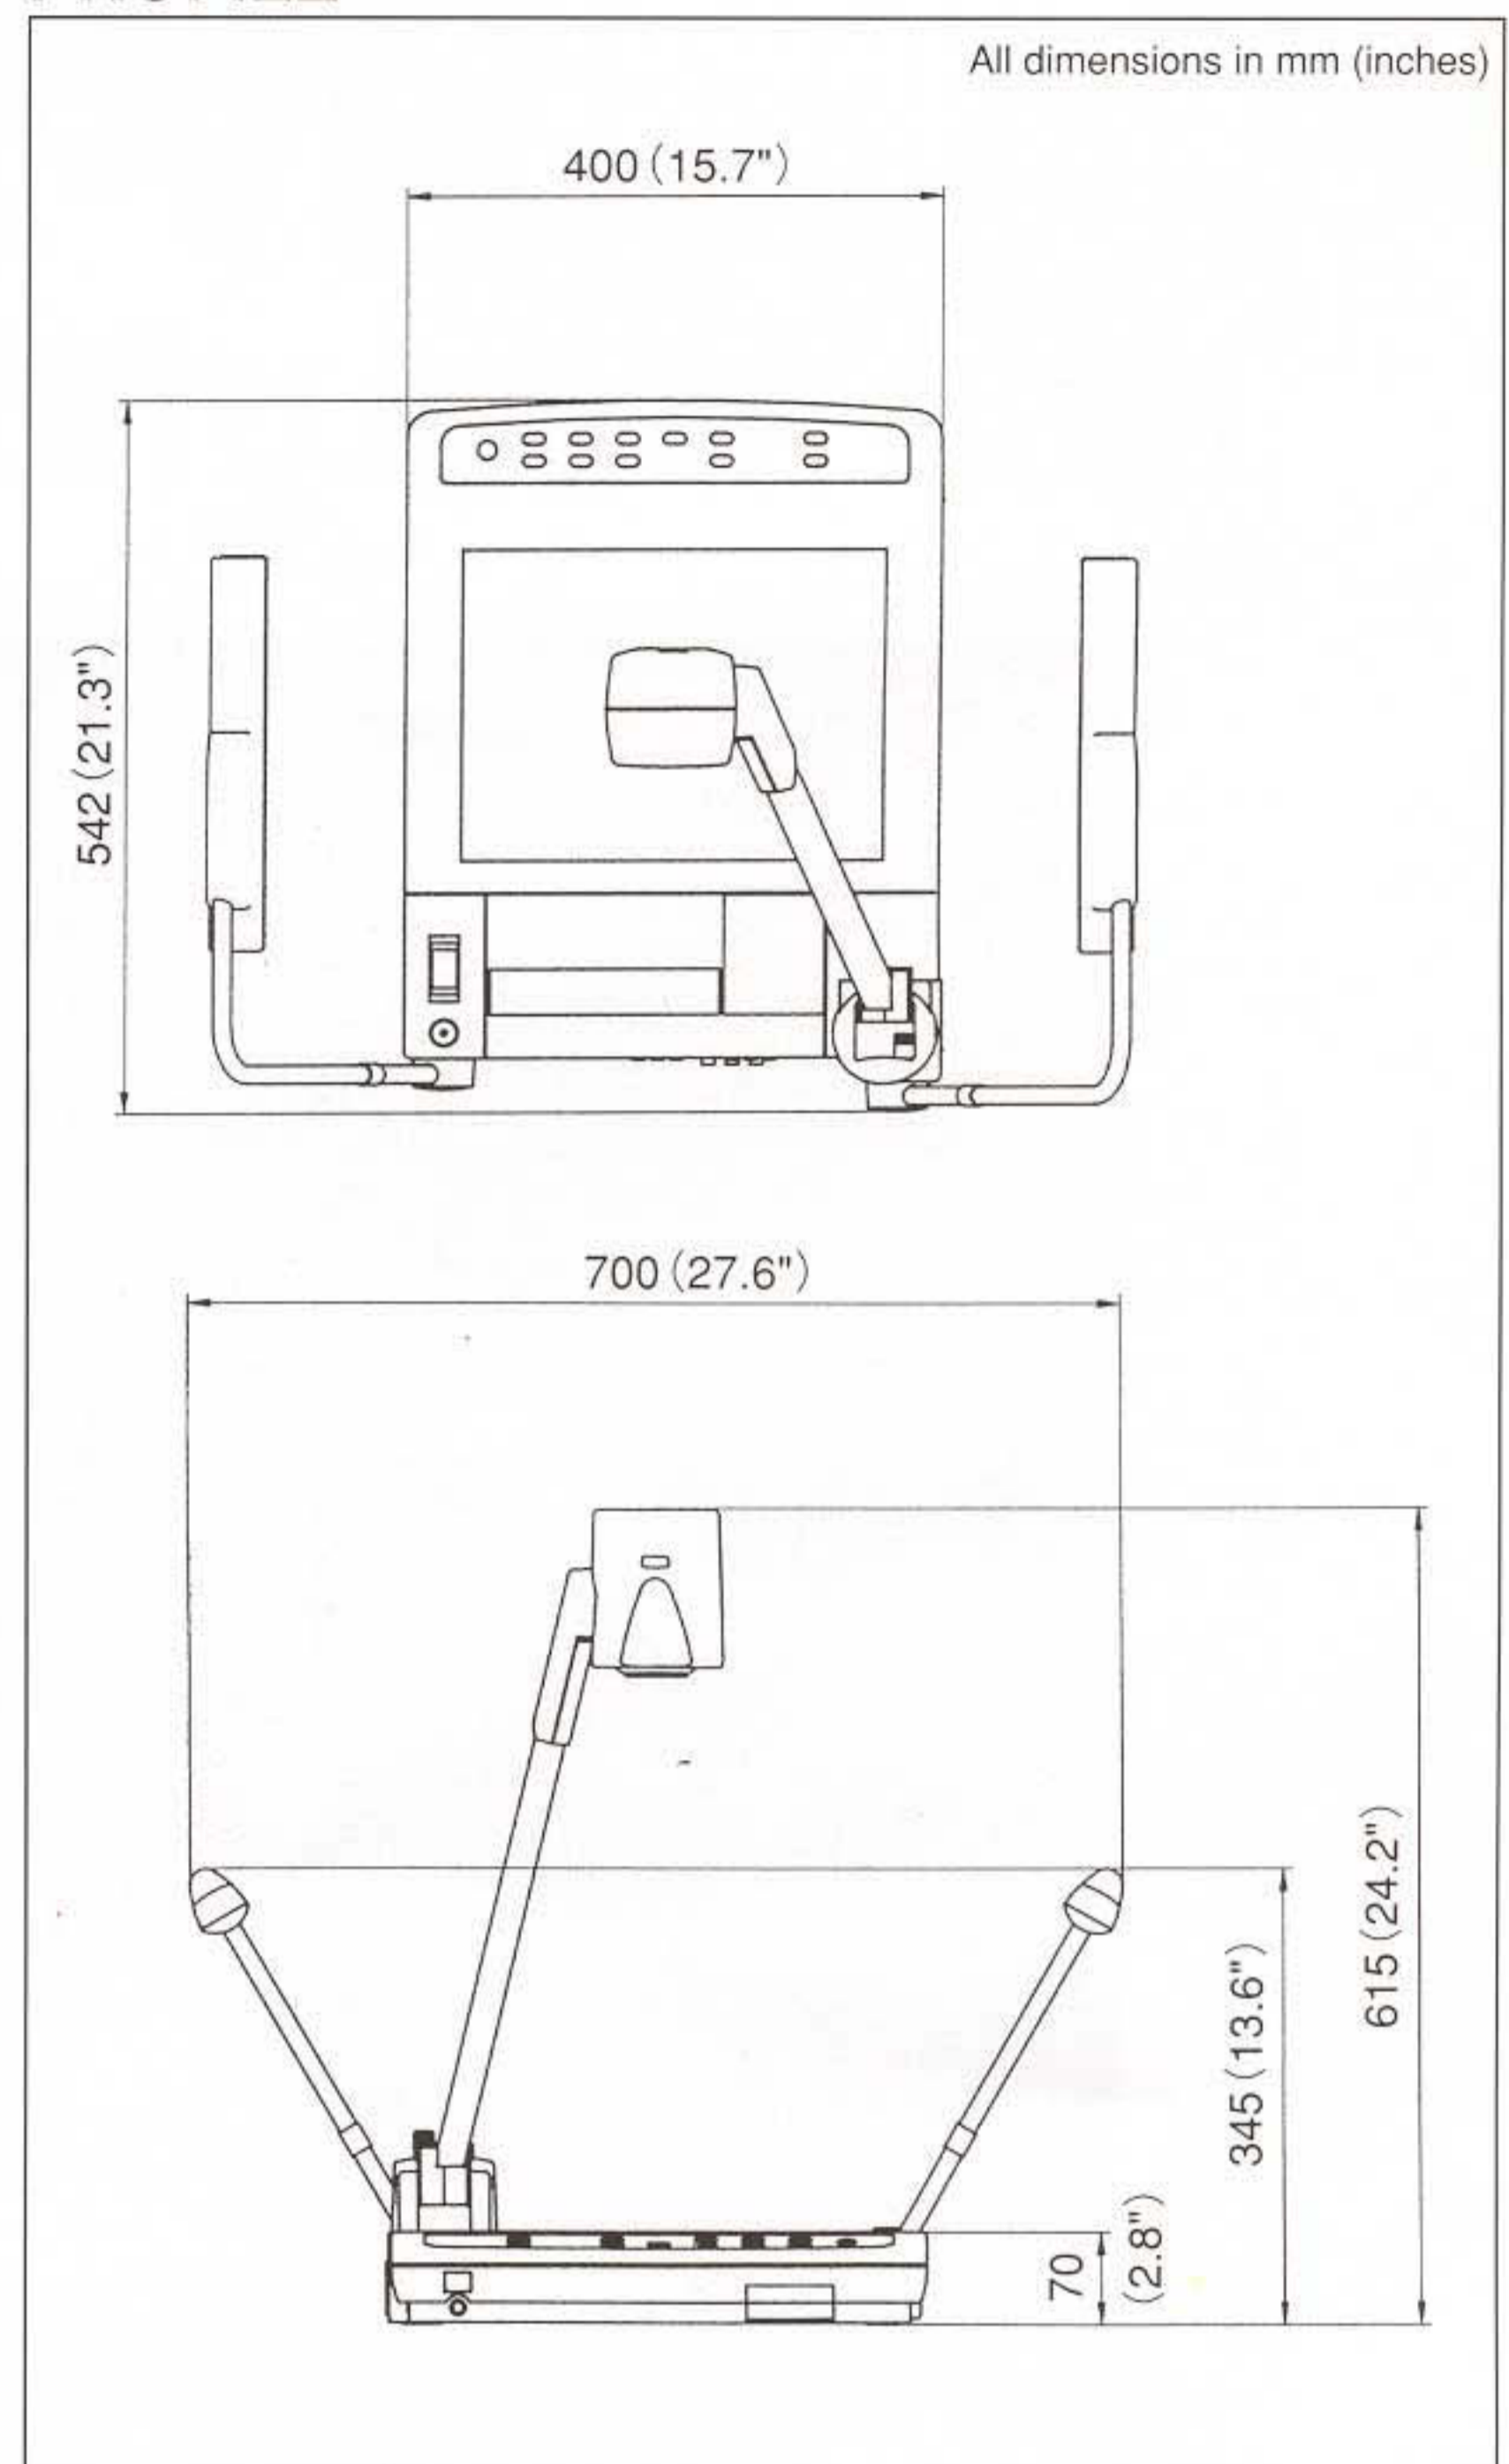

High Resolution Slide Film Presenter TRS-35XG  
XGA resolution of 1/3" 850,000 pixels CCD

**ELMO® ELMO CO., LTD.**

6-14, Meizen-cho, Mizuho-ku,  
Nagoya, 467-8567 Japan  
E-mail:elmo@gix.or.jp

Additional technical information is available from any of the following subsidiary companies;

### ELMO Mfg. Corp.

1478 Old Country Road,  
Plainview, NY 11803-5034, U.S.A.  
Tel. 516-501-1400 Fax. 516-501-0429  
E-mail:elmo@elmousa.com  
Web: <http://www.elmousa.com>

### ELMO Canada Mfg. Corp.

44 West Drive, Brampton,  
Ontario, L6T 3T6, Canada  
Tel. 905-453-7880 Fax.905-453-2391  
E-mail:info@elmocanada.com  
Web: <http://www.elmocanada.com>

### ELMO (Europe) G.m.b.H.

Neanderstr 18,  
40233 D sseldorf, Germany  
Tel. 0211-376051-53 Fax.0211-376630  
E-mail:elmoeurope@AOL.com  
Web: <http://www.elmo.de/>