


HIGH PERFORMANCE VISUAL PRESENTER EV-2000AF

SPECIFICATIONS


Power source	AC120V 60Hz
Rated current	0.5A
Image pick-up element	1/3" Interline-transfer CCD
Effective picture element	768(H)×494(V)
Total picture elements	811(H)×508(V)
Shooting area	340mm×252mm(13.4×9.9in.)max., 16mm×12mm(0.6×0.5in.)min.
Resolution(Horizontal)	More than 470TV lines (Y signal with horizontal)
(Vertical)	More than 350TV lines
S/N ratio	More than 48dB
Lens	f=5.8mm to 70mm (12-time zoom) ; F1.9 to 2.6
Close-up lens	Built-in
Iris	Auto(with level adjustment by remote control)
Zooming	24-time zoom(continuous zoom mode with automatic switching from the 12-time optical zoom plus electronic zoom with 2× function)
Focusing	Auto/manual
White balance	Auto
Nega/posi conversion	Built-in (by remote control)
Color/B&W selection	Built-in (by remote control)
Enlargement of the image	Provided(double, can be scrolled)
Head rotation	Built-in
Sync.system	Internal
Video output	S-video jack×1, composite video jack×2 (RCA,BNC connector)
Upper lighting unit	Built-in, Fluorescent lamp 9W×2
DC output	DC 12V(for optional monitor)
Wireless remote control	Supplied
External control	RS-232C(DSUB 9P connector (male))
Outside dimensions	500mm(W)×612mm(D)×99mm(H)(19.7×24.1×3.9in)-When folded 706mm(W)×403mm(D)×575mm(H)(27.8×15.9×22.6in)-When set up
Weight	6kgs(13.2lbs)

Note : Weight and dimensions are approximate.
Design and specifications are subject to change without prior notice.

PROFILE

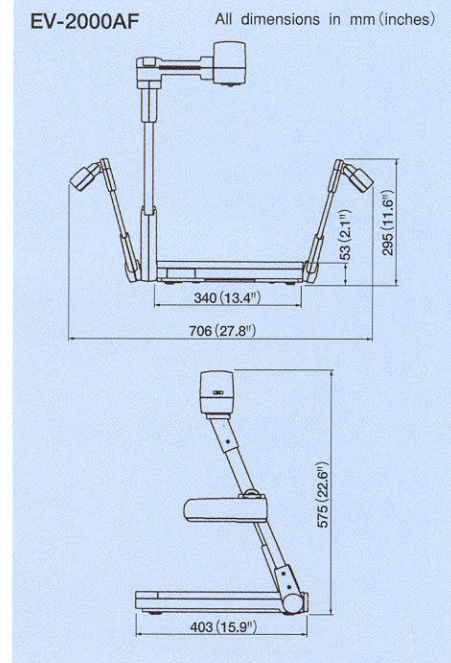

Optional 5" TFT LCD Color Monitor (LM-5011N)

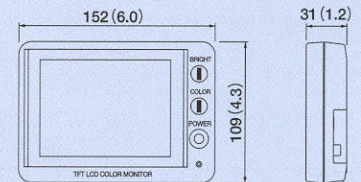

NTSC Standard VISUAL PRESENTER

EV-6000AF

- Dual camera system for flexible shooting
(Detachable sub-camera for hand-held use w/1.5m cable)
- Easy to use on-screen menu display
- 24x magnification on main camera
(12x optical zoom plus 2x electronic zoom)
- 7 picture memory (JPEG format) and pause/scroll mode



EV-8000AF 3CCD

- Equipped with 3 chip color CCD camera
- More than 750 TV lines (H) resolution
- Easy to use on-screen menu display
- 24x magnification (12x optical zoom plus 2x electronic zoom)
- 7 picture memory (JPEG format) and pause/scroll mode



ELMO® ELMO CO., LTD.

6-14, Meizen-cho, Mizuho-ku,
Nagoya, 467-8567 Japan
E-mail:foreign-div@elmo.co.jp

Distributed by

ELMO Mfg. Corp.

1478 Old Country Road, Plainview, NY 11803-5034, U.S.A.
Tel. 516-501-1400 Fax. 516-501-0429
E-mail:elmo@elmousa.com
Web:http://www.elmousa.com

ELMO (Europe) G.m.b.H.

Neanderstr 18, 40233 Düsseldorf, Germany
Tel. 0211-376051-53 Fax.0211-376630
E-mail:elmoeurope@AOL.com
Web:http://www.elmo.de/

ELMO Canada Mfg. Corp.

44 West Drive, Brampton, Ontario, L6T 3T6, Canada
Tel. 905-453-7880 Fax.905-453-2391
E-mail:info@elmocanada.com
Web:http://www.elmocanada.com